



- ULTRATHIN DESIGN ONLY 9MM
- HIGH EFFICIENCY LED CHIPS
- EMBEDDED AND SUSPENDING INSTRALLATION
- SURFACE MOUNTED AND RECESSED FRAME
- 50,000 HOURS AVERAGE LAMP LIFE
- 5 YEARS WARRANTY

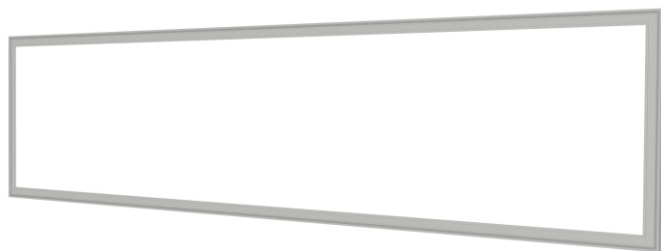

EMC LM-79 LM-80 TM-21 ISTMT VEET IPART

Model Number	PL-3060-26N	PL-6060-36N	GL-PL30120-30D	GL-PL30120-36N	PL-6012-60N
VEET / IPART	/	/	Approved	Approved	/
Dimmable	NO	NO	YES	NO	NO
Power	26W	36W	30W	36W	60W
Input Voltage	100-240VAC 50-60Hz	100-240VAC 50-60Hz	100-240VAC 50-60Hz	100-240VAC 50-60Hz	100-240VAC 50-60Hz
Lumens	2600lm±5%	3600lm±5%	3100lm±5%	3700lm±5%	6200lm±5%
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
CRI	>82	>82	>82	>82	>82
Color Temperature	4000K / 6500K	4000K / 6500K	4000K / 6500K	4000K / 6500K	4000K / 6500K
Beam Angle	110°	110°	110°	110°	110°
Dimensions	295*295*9mm	595*595*9mm	1195*295*9mm	1195*295*9mm	1195*595*9mm
IP Rating	IP40	IP40	IP40	IP40	IP40
Operating Temperature	-25°C ~ +45°C	-25°C ~ +45°C	-25°C ~ +45°C	-25°C ~ +45°C	-25°C ~ +45°C
Life Time	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours
Warranty	5 Years	5 Years	5 Years	5 Years	5 Years

- CYANOSIS OBSERVATION INDEX 1.8 < 3.3 Limit (AS/NZS 1680.2.5:1997)
- HIGH CRI >94
- ULTRATHIN DESIGN ONLY 9MM
- HIGH EFFICIENCY LED CHIPS
- EMBEDDED AND SUSPENDING INSTRALLATION
- SURFACE MOUNTED AND RECESSED FRAME
- 5 YEARS / 50,000 HOURS WARRANTY

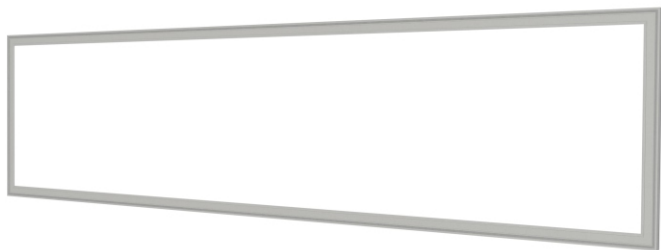

EMC LM-79 LM-80 TM-21 ISTMT VEET IPART

Model Number	GL-PL30120-30D	GL-PL30120-36N
VEET / IPART	Approved	Approved
Dimmable	YES	NO
Power	30W	36W
Input Voltage	100-240VAC 50-60Hz	100-240VAC 50-60Hz
Lumens	2400lm±5%	2900lm±5%
Power Factor	>0.95	>0.95
CRI	>94	>94
COI	1.8	1.8
Color Temperature	4300K	4300K
Beam Angle	110°	110°
Dimensions	1195*295*9mm	1195*295*9mm
IP Rating	IP40	IP40
Operating Temperature	-25°C ~ +45°C	-25°C ~ +45°C
Life Time	50,000 Hours	50,000 Hours
Warranty	5 Years	5 Years